MODEL ADS
UNIVERSAL AUTODUAL/STARTER COMBINATION
GENERAL ARRANGEMENT FOR OILLESS COMPRESSOR

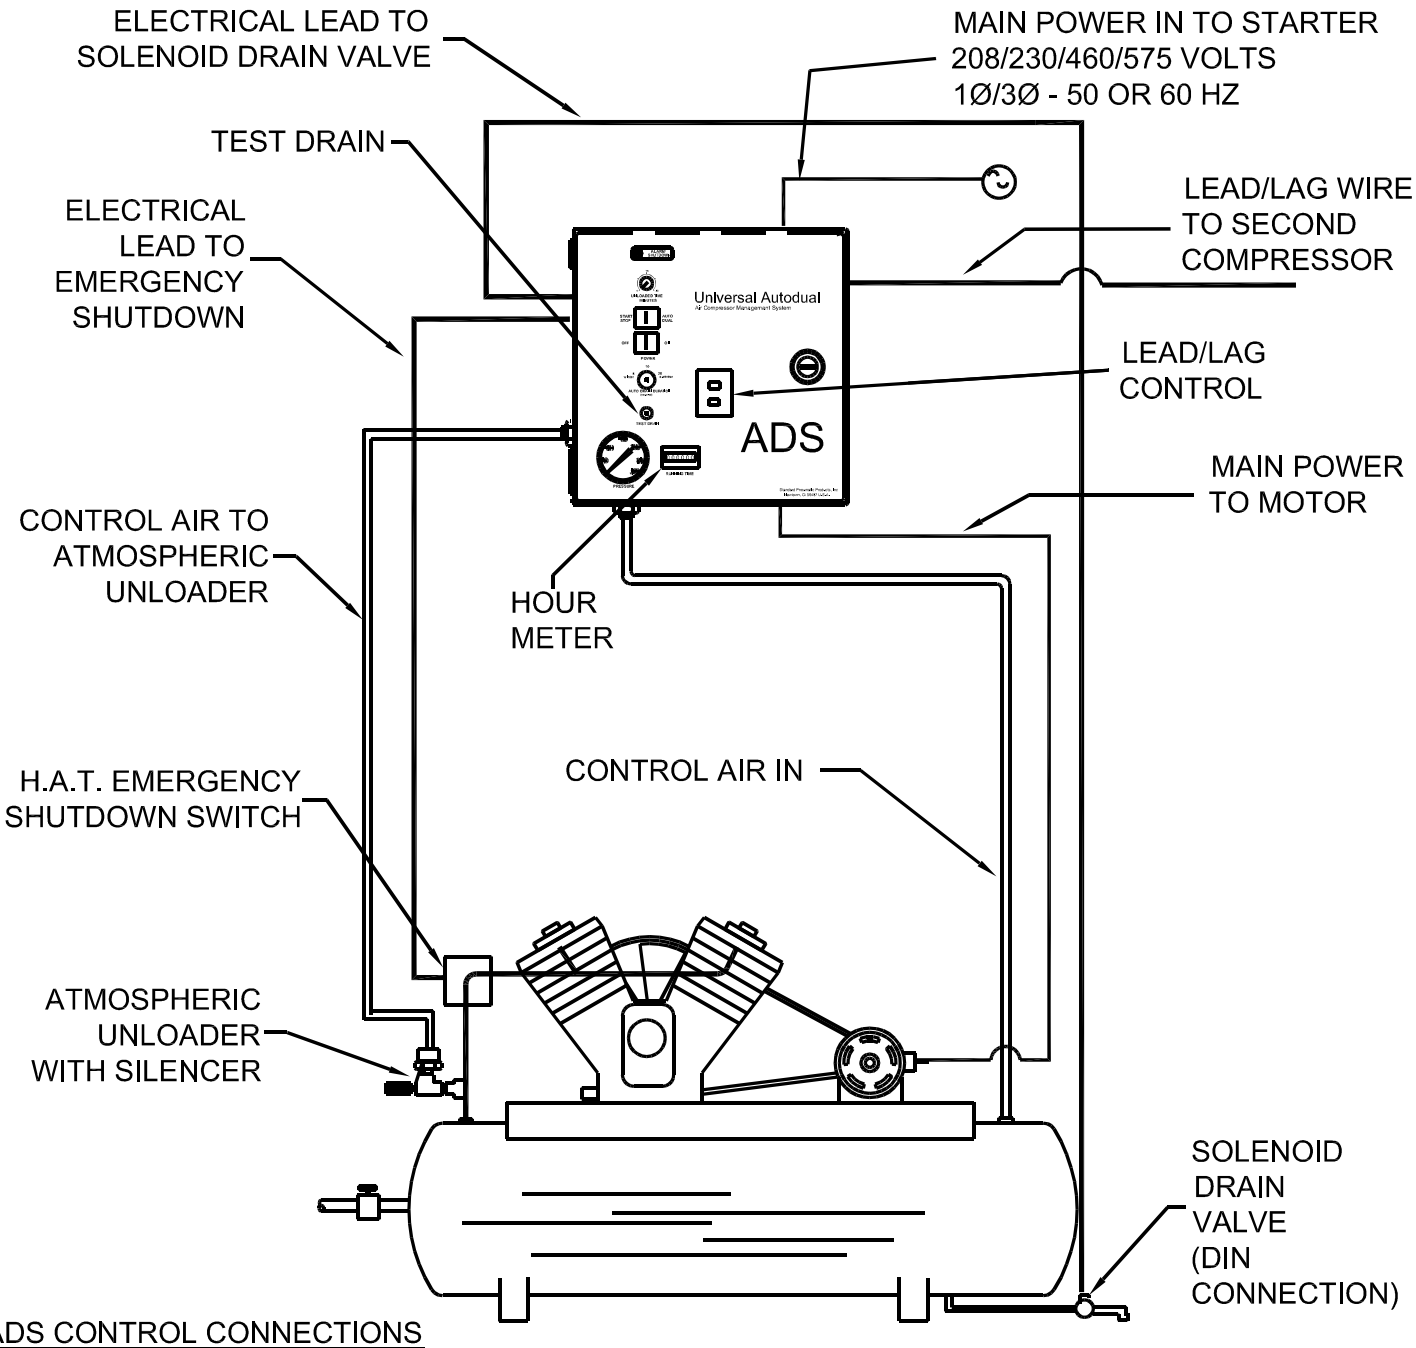

ADS CONTROL CONNECTIONS

ELECTRICAL:
1) POWER IN TO ADS
2) POWER OUT TO MOTOR

PNEUMATIC:
1) CONTROL AIR FROM TANK TO ADS
2) CONTROL AIR OUT TO ATMOSPHERIC UNLOADER

OPTIONS:
1) AUTO DRAIN
2) EMERGENCY SHUTDOWN (H.A.T.)
3) LEAD/LAG CONTROL

ADSstdconfigOilless/fig2