
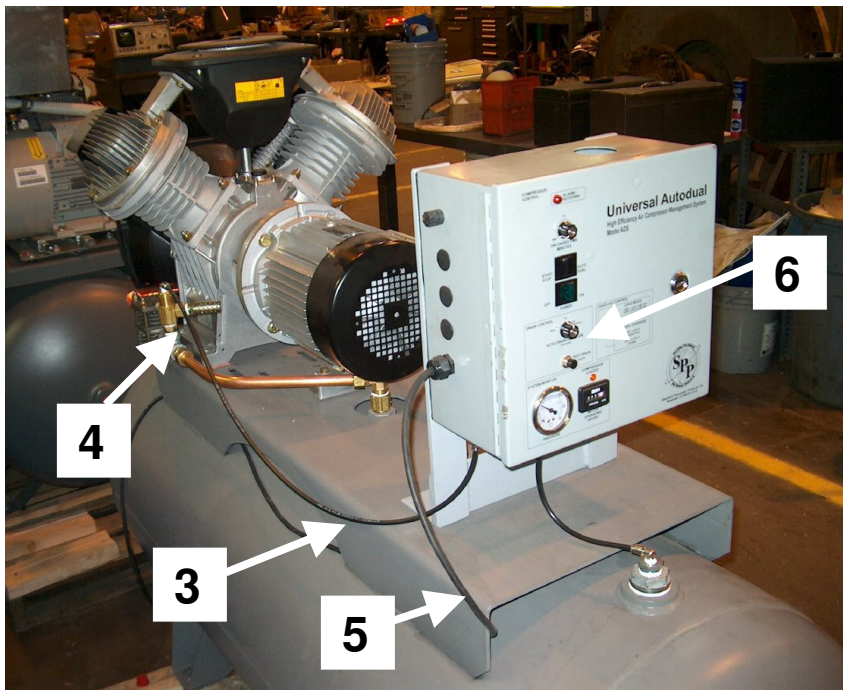


Model ADS Autodual/Starter Combination Installed on 3 Atlas Copco 5 hp Oilless Compressors at a Sewage Treatment Plant in Washington State

The ADS High Efficiency Universal Autodual/Starter Combination insures simplicity of installation and operation with the following benefits:

- Selection of Automatic Dual or Start/Stop Control
- Automatic Initial Unloading (5-second delay)
- Running Timer
- Pressure Gauge
- Auto Tank Drain
- CUL Listed
- IEC Starter

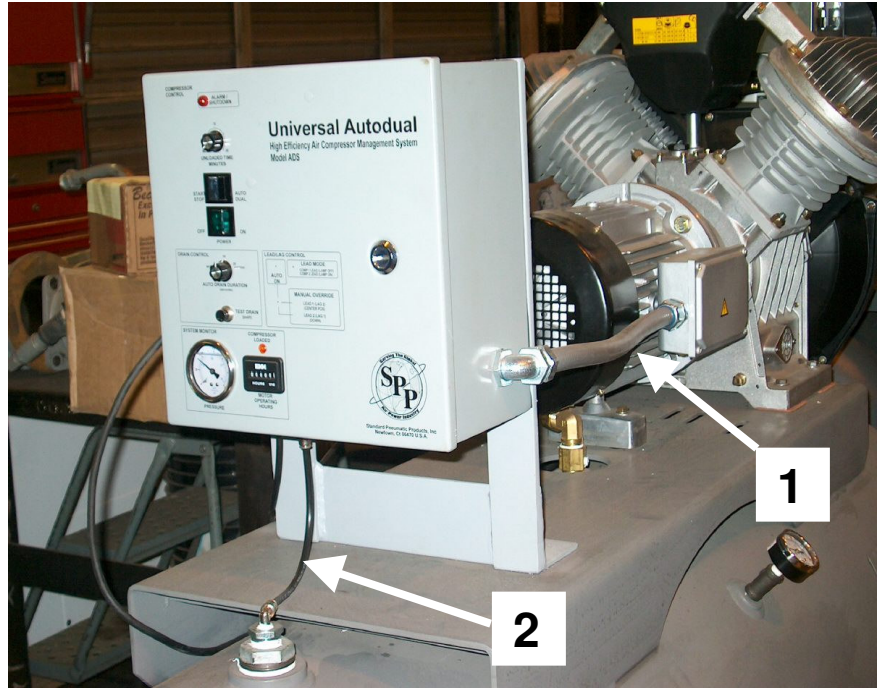

Simple and Time-Saving Installation:

1. A Single Lead from Autodual to Motor – all other wiring is complete inside the Autodual enclosure
2. Control Air into Autodual
3. Control Air to Unloader
4. Atmospheric Unloader
5. Automatic Drain Lead to Autodrain under Tank
6. Autodrain Controls mounted on Autodual Panel